



## Flexible Separator

Deteriorating Hydraulic fluid has been estimated to be responsible for at least 70 % of all Hydraulic Failures.

If no moisture or corrosive gases are allowed to enter the fluid reservoir, the result is reduced Oxidation & emulsification of the fluid, cleaner fluid, longer fluid life, reduced corrosion to the inside of the reservoir and system components



The Fawcett Christie separators prevent contaminations entering the hydraulic fluid at the reservoir, resulting in cleaner fluid & longer fluid life. This will in turn provide longer life for filter elements & system components, thus reducing downtime and operating cost

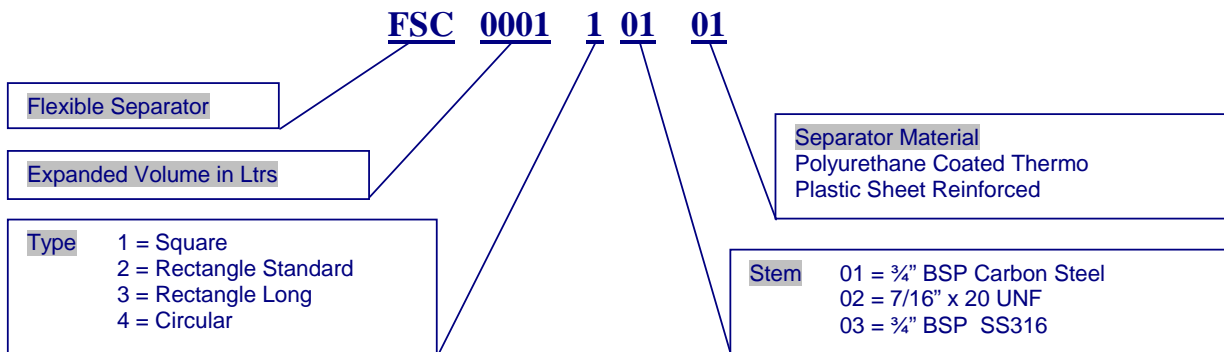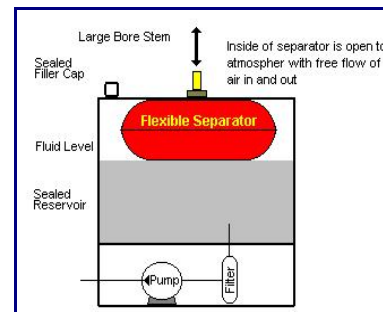

Size-Liters.		01	02	03	04	06	08	10	15	18	20	25	30	40	50	60	70
Type1 Square	L	240	280	300	320	380	400	420	480	500	520	560	600	660	700	740	780
	H	128	153	166	178	217	229	242	280	293	306	331	357	395	420	446	471
Type2 Rectangle Std.	L	260	320	360	400	440	480	520	580	620	640	700	720	800	840	900	940
	W	190	220	250	280	300	340	360	400	420	440	460	500	540	580	620	640
	H	96	115	134	153	166	191	204	229	242	255	267	293	318	344	396	382
Type3 Rectangle Long	L	400	440	540	590	620	590	760	860	900	920	980	1060	1160	1260	1360	1460
	W	140	180	190	240	240	280	280	320	320	340	360	380	420	440	460	480
	H	64	89	95	127	127	153	153	178	178	191	204	217	242	255	267	280
Type4 Round	L	250	295	330	368	412	440	465	520	540	580	640	664	706	784	810	850
	H	134	163	185	210	238	255	270	306	320	344	382	400	426	475	490	515

LL - Length, W - Width, H - Height, D - Diameter  
Special Bellow types are available on request